
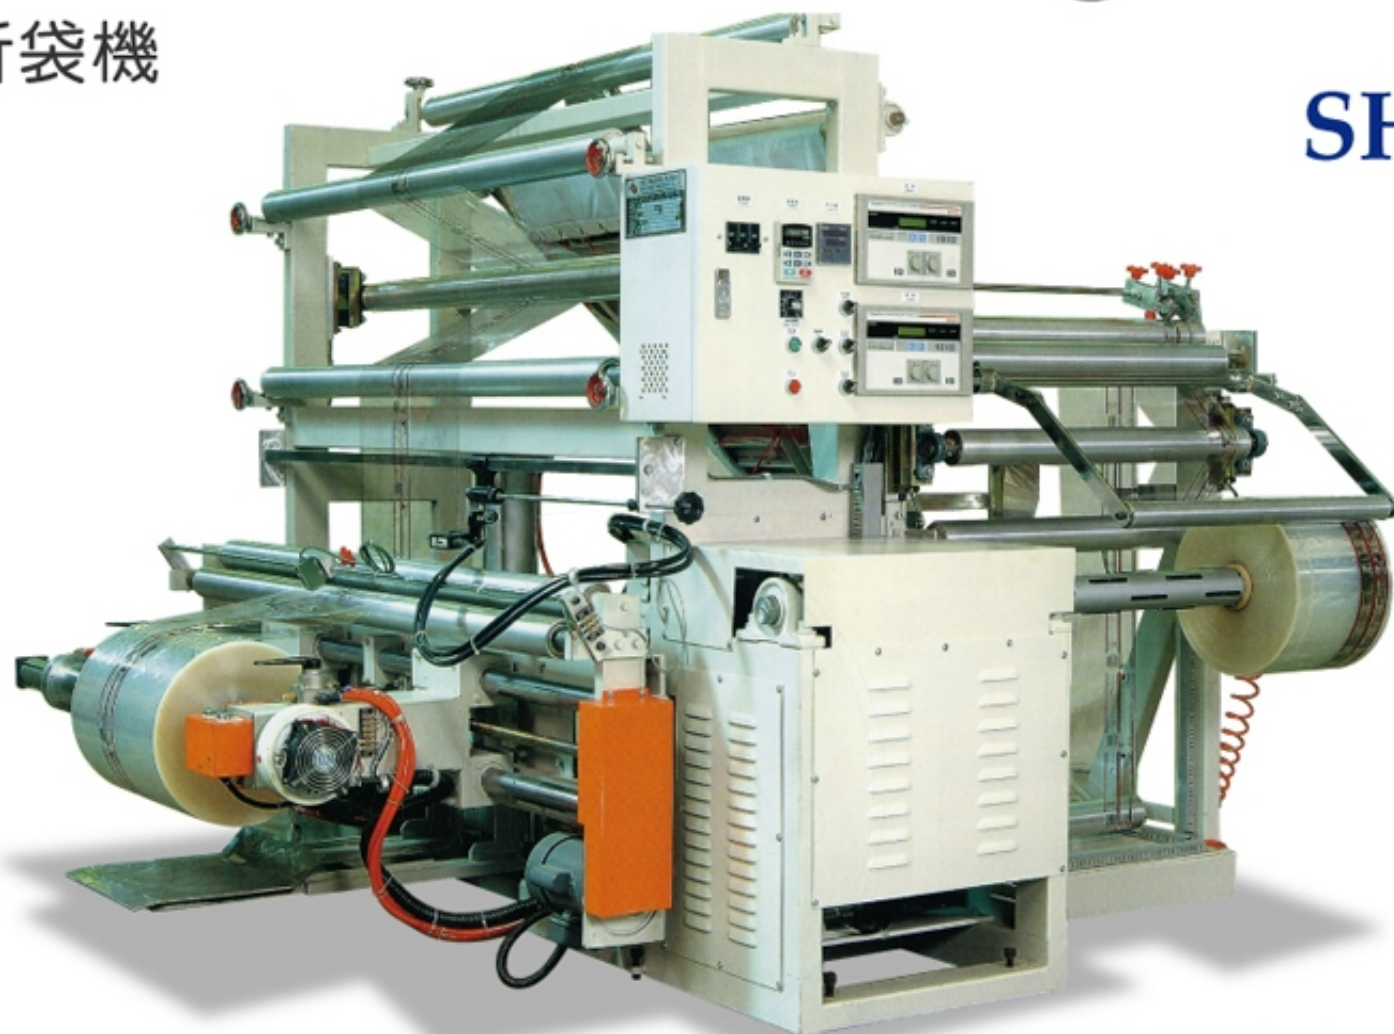


Automatic Sandwich Folding Machine

全自動三角折袋機

SHSF

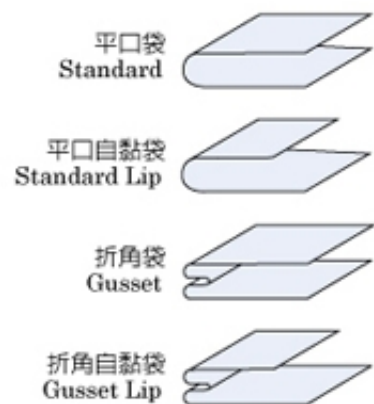

For All Your Plastic Bagging Needs

興享機器興業有限公司
SING SIANG MACHINERY CO., LTD.

70969 台灣台南市和順工業區永安路66號 TEL: +886-6-356-3297 FAX: +886-6-356-7267

66 Yung-An Road, Ho-Sun Industrial, Tainan, Taiwan


<http://www.bag-machine.tw>

Email: ssmtaiwan@gmail.com


Toll-Free Service Hot line: 0800-030-567

Web Site: www.興享.tw



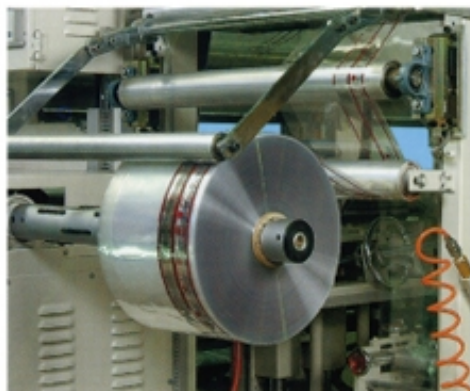


- 收料張力感知器 Rewinder Tension Sensor
- 氣壓軸 Air Shaft

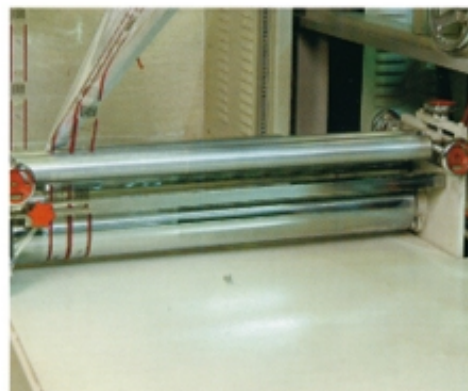

- 預熱裝置 Pre Heat Device



- 入料張力感知器 Unwinder Tension Sensor
- * (選購配備 Optional Accessories)

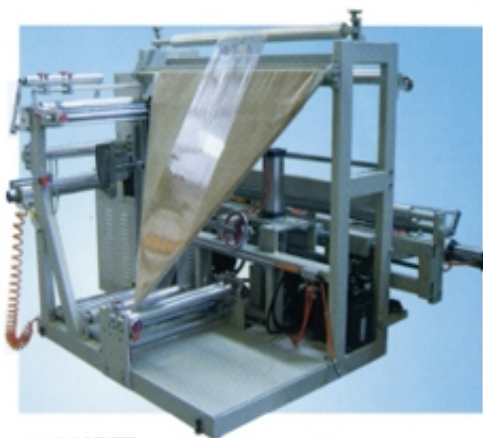

- 側視圖 Side View

特性：(標準配備)

1. 本機為OPP, CPP, PE單層膜對折作業專用，放料及收料同步運轉，出料平穩順暢。
2. 放料採用半自動張力控制器和磁粉剎車。
3. 收料採用全自動張力控制器（附張力感知器）和磁粉離合器。
4. 放料採用氣壓無軸式，原料裝卸方便。
5. 收料採用氣壓軸心，卸料快速方便。
6. 原料座配備自動對邊裝置。
7. 主機為5HP交流馬達驅動、變頻器無段變速。
8. 附長度計米器及無料自動停車裝置。

* 選購配備：放料改用全自動張力控制器（附張力感知器）

Special Features :(Standard Accessories)

1. Special for sandwich folding of single sheet OPP, CPP, & PE film.
Unwinder and rewinder motors are synchronized, ensure stable and smooth production.
2. Semi-automatic tension control & powder break on unwinder.
3. Full-automatic tension control (with tension sensor) & powder clutch on rewinder.
4. Penumatic shaftless unwinder provides convenient, fast material handle.
5. Air shaft on rewinder provides convenient, fast product unload.
6. Edge Position Controller (EPC) for unwinder ensures smooth and neat edge of material.
7. 5 HP AC motor & inverter for variable speed drive.
8. Equipped with length counter & film-less Auto Stop Device.

* Optional Accessories : Full-automatic tension control (with tension sensor) on unwinder.

機器規格 SPECIFICATION:

型 號 Model	速 度 Speed	膜 寬 Film Width	總 電 量 Power Consumption	機 器 尺 寸 Machine Dimension (LxWxH)	裝 箱 尺 寸 Machine Packing (LxWxH)	淨 重 Machine Weight	毛 重 Gross Weight
SHSF-1200	40~150M	0.1M~1.2M	4KW	2.5 x 2.1 x 1.7M	2.9 x 2.3 x 2.0M	1550kg	1750kg
SHSF-1500	40~150M	0.1M~1.5M	4KW	2.8 x 2.3 x 2M	3.2 x 2.3 x 2.3M	1650kg	1850kg