


# ***Servo Driven Multilane Bottom Seal and T-shirt Bag Making Machine***

**AP-800B4**

**AP-1000B4**



**APEX-PLAS®**

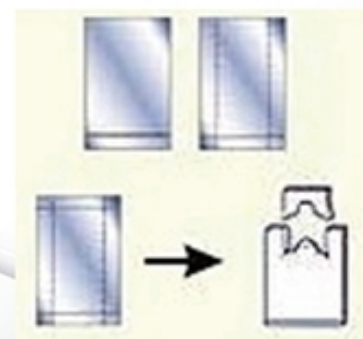

- features:**
- ※ Max. capacity 140 pieces/each line.
  - ※ Fully digital control system with Human Machine Interface for data setting and showing.
  - ※ Sealing bar can be changed easily for T-shirt bag or plain bag
  - ※ Out-feed by servo system.
  - ※ Automatically stops for out of film, jam bags, temperature abnormal, safety....etc.
  - ※ Smart scissors adjustment design for the cutting knife, save your time and money.

- Option Equipment:**
1. Automatic table conveyor for stacks then move.
  2. Hot pin stack for T-shirt bag.
  3. Bottom silicon roller for sealing device, reduce the transfer resistance and increase sealing strength.
  4. 4 Lines small bag and 2 line big width bag In-feed roller system.
  5. More line equipment for 8 lines in line.



Double layer sealing knife with rubber roller



Hot pin stack device

| Model     | Bag Size(mm) |                       |                          | Capacity     | main motor/servo motor/<br>feed motor/Heater       | Power require/<br>Air require                 | Machinene size/<br>Weight(kg)                                 | Packing size/<br>Loading container                 | Remark                              |
|-----------|--------------|-----------------------|--------------------------|--------------|----------------------------------------------------|-----------------------------------------------|---------------------------------------------------------------|----------------------------------------------------|-------------------------------------|
|           | Line         | line*layer*W*L        | Total film<br>thickneess | pcs/min*line |                                                    |                                               |                                                               |                                                    |                                     |
| AP-800B4  | 4            | Max.<br>2x2x385x1200  | 0.008~0.2                | 30~140x4     | 1HP with gear/ AC 2~3KW*1/<br>DC 500W*2/ 2.2KW*2   | 3phase 7.0KW/<br>0.4Mpa (4kg) and<br>150L/min | Length 4.0M Width 1.53M Height 2.0M/<br>NW. 1200kg GW. 1350kg | L 2.23MxW1.45MxH2.2M/<br>20FT--4 sets 40FT--8 sets | 8 lines need add<br>optional device |
|           | 8            | Max.<br>2x2x385x1200  |                          | 30~120x8     |                                                    |                                               |                                                               |                                                    |                                     |
| AP-1000B4 | 4            | Max.<br>2x2x480x1200  | 0.008~0.2                | 30~140x4     | 1HP with gear / AC 2~3KW*1/<br>DC 500W*2 / 2.4KW*2 | 3phase 7.4KW/<br>0.4Mpa (4kg) and<br>150L/min | Length 4.0M Width 1.73M Height 2.0M/<br>NW. 1300kg GW. 1450kg | L 2.23MxW1.45MxH2.2M/<br>20FT--3 sets 40FT--7 sets | 8 lines need add<br>optional device |
|           | 8            | Max.<br>4x2x2250x1200 |                          | 30~120x8     |                                                    |                                               |                                                               |                                                    |                                     |



**APEX-PLAS** INDUSTRIAL CO., LTD.

11F-1, No.393, Fuxing Rd., Taoyuan City, Taoyuan County 33066, Taiwan  
Tel : +886-3-3319116 Fax : +886-3-3319339

www.apexplas.com  
E-mail : ap@apexplas.com