

RE

Rewinding Machines

Inspection / CCD / Reversible / Wide / Narrow / Splice / Trim reels



REF-60R Series



REF-130R Series




www.dahbah.com.tw



DAH BAH
QUALITY • PROFESSIONAL • INNOVATION

Rewinding Inspecting Machines

REF-Small Roll Series

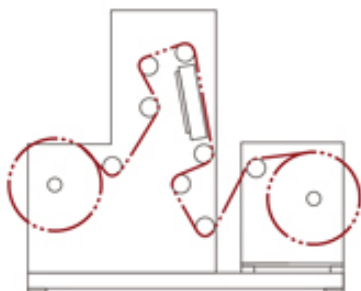

Specification :

Model No.	REF-Small Roll
Max. Parent Web Width	400 / 600 mm
Max. Parent Web Diameter	500 mm
Unwind / Rewind Core I.D.	3" or 6"
Max. Machine Speed	200 M / min.

Features :

Material

- Plastic laminated film 40-150μ.

Unwinding / Rewinding Section

- Cantilevered air-shafts (φ3") making loading and unloading easier.
- Equipped with edge position control (EPC) to provide accurate film positioning for unwinding.


Tension Control

- Equipped with automatic tension controlling system and load-cells.

Inspecting Section

- Equipped with inspecting acrylic board and fluorescent lamps, making inspecting easier.
- Synchronize stroboscope with photo sensor.

REF-Wide Roll Series

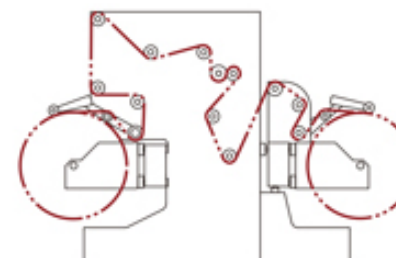

Specification :

Model No.	REF-Wide Roll
Max. Parent Web Width	1000 / 1300 mm
Max. Parent Web Diameter	800 mm
Unwind / Rewind Core I.D.	3" or 6"
Max. Machine Speed	200 M / min.

Features :

Material

- Plastic laminated film 40-150μ.

Unwinding / Rewinding Section

- Shaftless type unwinding stand with φ3" adapters.
- Equipped with digital type line position control (LPC) to provide accurate film positioning for unwinding.

Inspecting Section

- Equipped with inspecting acrylic board and fluorescent lamps, making inspecting easier.
- Reversible running.
- Synchronize stroboscope with photo sensor.

Optional Accessories

- Splicing table with suction device
- Inspecting camera with monitor



Add. No. 69-10, Sec. 2, Chung Shin Rd., Tali Dist., Taichung City 412, Taiwan
 Tel. +886-4-2483-2477 Fax. +886-4-2483-0852
 E-Mail. dahbah@dahbah.com.tw website. www.dahbah.com.tw

* The working speed depends on the material condition.

* Due to machine development, above information may change without notice.

Designed By Polaris | 886-4-24517070 | 02.2018