



CO-EXTRUSION LAMINATION MACHINE FOR THICK PET SHEET

FK/LA-100/125-1400



Extrusion Excellence

www.fki.com

FK/LA-100/125-1400

CO-EXTRUSION LAMINATION MACHINE FOR THICK PET SHEET




Design Line Speed

150 MPM



Max. Running Speed

120 MPM




Roller width

1400 mm



Lamination Thickness

0.01~0.05 mm

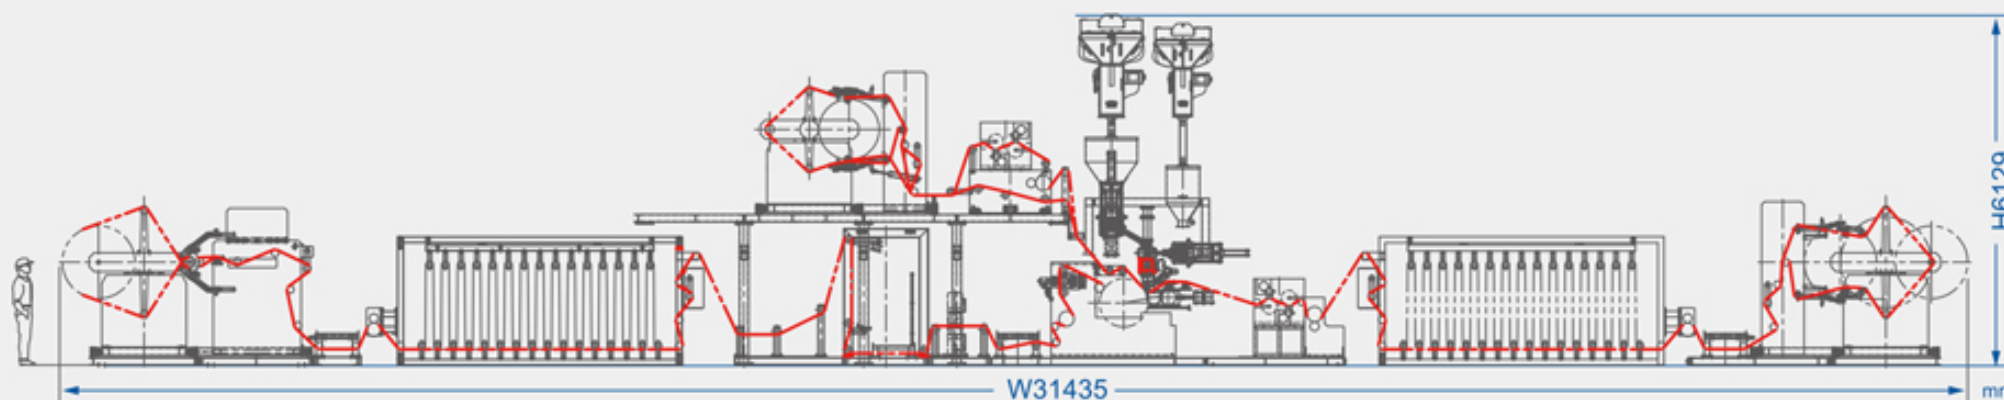

Extruder A / B : 100mm / 125mm, 100HP / 200HP, L/D 32:1

2 Layer Feedblock : AB / AA, Cloeren Brand

Main Unwinder : 1200mmΦ, Top & Bottom Cutter, 3" + 6" Air Shaft

Lamination Unit : 800mmΦ

Sandwich Unwinder : 800mmΦ, Top & Bottom Cutter, 3" + 6" Air Shaft

Rewinder : 1200mmΦ, Top & Bottom Cutter, 3" + 6" Air Shaft

Drive & PLC : MITSUBISHI, Japan

AVG. Power Consumption : 278KW / 423A

Max. Extrusion Capacity : 320 / 500 kg/hr

Auto T-Die, Cloeren Brand

Driven by Powder Brake, 20Kg-M x 2

Drive Motor : 20HP

Driven by Powder Brake, 3" + 6" Air Shaft , 10Kg-M x 2

Drive Motor : 15HP Constant HP Motor x 2

HMI MITSUBISHI

Machine Space: 35 x 14 x 7M (Lx Wx H)

We reserve the right to make technical changes without prior announcement. All rights reserved. ©2018 FONG KEE INTERNATIONAL MACHINERY CO., LTD.

Designed by F&E 2018-07, +886-4-24517870



FONG KEE INTERNATIONAL MACHINERY CO., LTD.

No. 168, Cheng Pei First Rd., Yongkang Dist., Tainan City 71042, Taiwan

Tel. +886-6-2532157

Fax. +886-6-2533079

Email. sales@fki.com



www.fki.com uCloud