

Servo Motor Driven Double Layer T-Shirt Bag & Bottom Bag Making Machine

伺服馬達驅動 雙層式背心袋及底封袋製袋機

SHTF-30P



SMP-3
手動沖床
Manual Punch



興享機器興業有限公司
SING SIANG MACHINERY CO., LTD.

70969台灣台南市和順工業區永安路66號 TEL : +886-6-356-3297 FAX : +886-6-356-7267

66 Yung-An Road, Ho-Sun Industrial, Tainan, Taiwan


<http://www.bag-machine.tw>

Email: ssmtaiwan@gmail.com


Toll-Free Service Hot line: 0800-030-567

Web Site: www.興享.tw



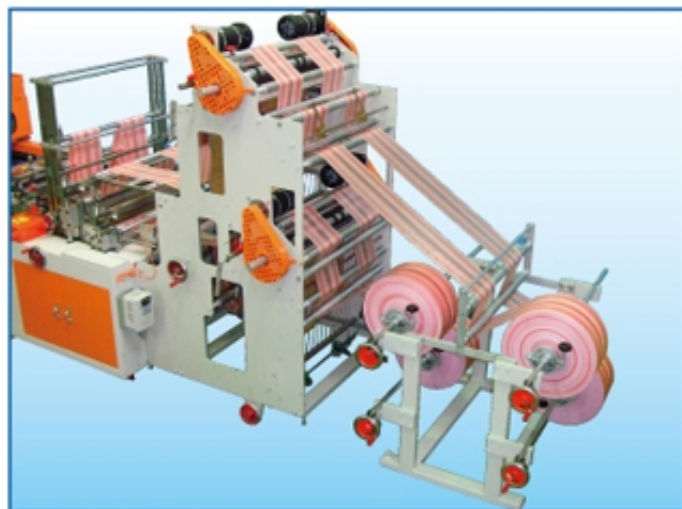

● 雙層入料裝置 Double Layer Infeed Device

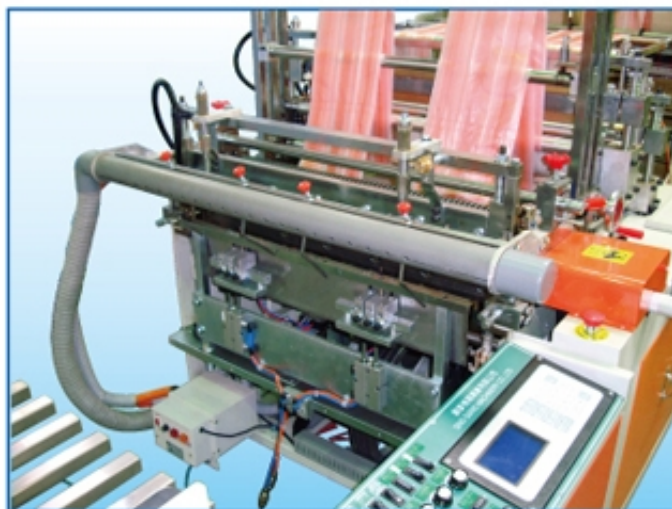

● 熱針裝置 Hot Pin Device



● 沖床 Punch

特色：

1. 單伺服馬達驅動、機體傳動輕快、穩定、每分鐘可產120個袋子。
2. 專為有電腦操作障礙者所設計的人性化電腦操作面板，易懂易操作。
3. 電腦按鍵式製袋長度自動調整，出袋長度精準、廢料少。
4. 機器結構設計精簡、組裝精密，牢固耐用、保養簡易。
5. 操作簡便、封切口整齊美觀又牢固。
6. 電眼印刷追蹤、袋子印刷位置精準，當發現印刷失準機器自動停機。
7. 單溝、雙溝旋轉式鋼刀，可做背心袋及底封袋。
8. 選購配備：旋轉盤空油增壓缸式手動沖床。

Features :

1. Servo motor driven, efficient mechanical structure produce 120 bags per minute.
2. User-friendly control panel, easy to understand easy to operate.
3. Digital control for production length adjusting, precise and less wastage.
4. Simple design, assemble precisely, durable, and easy for replaced maintaining.
5. Easy operating, pleasant cutting and sealing, with high firmness and no scratch.
6. Real time printing tracing control for accurate registration, when printing error occurred machine will stop automatically.
7. One line & two line adjustable sealing blade for T-shirt bag and bottom sealing bag.
8. Optional accessories: Rotate table boost cylinder type manual punch.

規格 SPECIFICATION :

型號 Model	產能 Output Cycle/min.	封寬 Bag Width	封長 Bag Length	封厚 Film Thickness	主馬達 Main Motor	總電量 Power Consumption	機器尺寸 Machine Dimension (LxWxH)	淨重 Machine Weight	毛重 Gross Weight
SHTF-30P	Max 120	Max 320m/m×2	Max 750m/m	0.01~0.04 m/m	2HP4P	3.5KW	6000×1430×2060	2300kg	2700kg
SHTF-36P	Max 100	Max 380m/m×2	Max 750m/m	0.01~0.04 m/m	2HP4P	4.0KW	6000×1585×2060	2400kg	2800kg
SHTF-42P	Max 90	Max 440m/m×2	Max 750m/m	0.01~0.04 m/m	2HP4P	4.5KW	6000×1740×2060	2500kg	3000kg

Specification are subject to change without notice (變更設計恕不另行通知)