HPR-34C

Fully Automatic Perforated Bag on Roll with Core Making Machine


Special design for making :





Feature:

- Equipped with Japanese made servo motor & driver system.
- Tension-free design of film fed-out for better seal quality and less workload of servo motor.
- 3. Touch screen controller enables worker to set up the production speed and bag length from the "Auto rewinder".
- "Edge Position Controller" (EPC) on the "Tension Unit" ensures uniform roll rewinding.
- Self-developed and streamline machine control program ensure easy operation & maintenance.
- "Auto rewinder" for 2-line production increases manpower efficiency and production output.
- Pneumatic cylinder film lifting-up design for easy film roll loading.
- Optional attachment to the machine: 1. Photocells
 - 2. C-folding device
 - Triangle folding device (center folding)

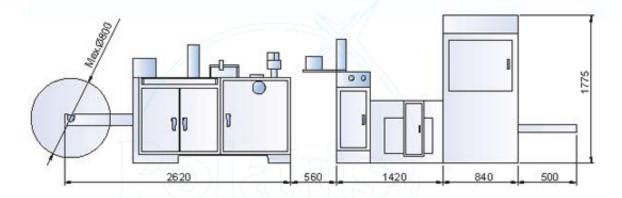

Specifications:

Model	HPR-34C
Max. film width	350mm X 2 lines
Max. finished bag width	300mm X 2 lines
Max. bag length	1,200mm
Max. dia. of bag roll	180mm
Film thickness	0.008~0.035mm
Production speed	100M X 2 lines
Electrical requirement	11kw
Pneumatic requirement	7 kg/cm², 500 L/min.
Machine dimension(LXWXH)	5940 X 2390 X 1775mm

- Specifications subject to change without notice.
- Production output depends on product specification, dimensions, type, thickness and quality of film. static charging, printing, bags quantity of each roll.



亨 運 機 械 股 份 有 限 公 司 HONG YUENG MACHINERY CO., LTD.

No.6, Lane 60, Chazhuan 1st Street, Guishan Shiang, Taoyuan County, Taiwan Fax: +886 3 350 9567

Tel: +886 3 350 9566

E-mail:hongyuen@ms18.hinet.net Http://www.hongyueng.com