


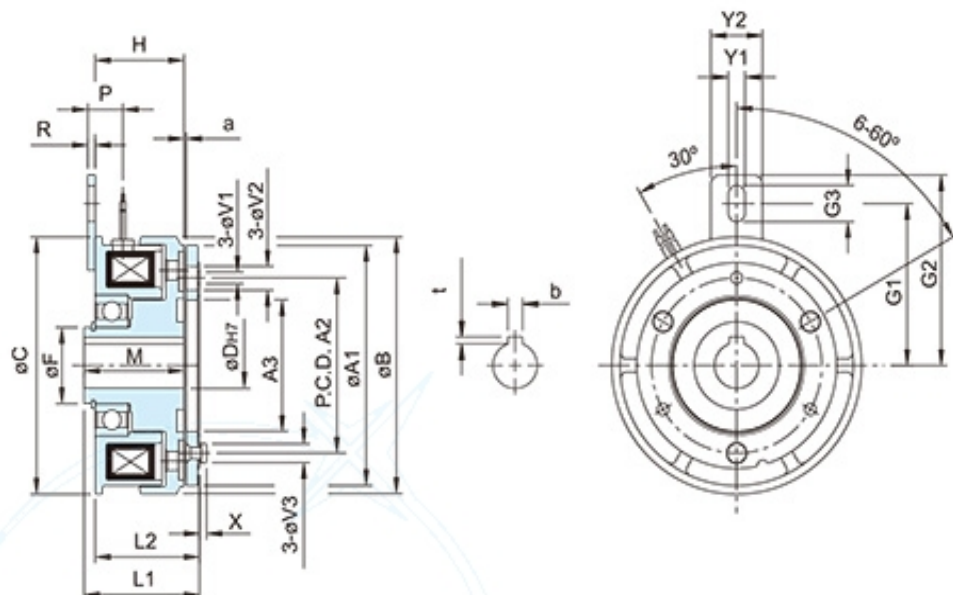

型號 MODEL	CDE0S6AA(AB)	CDE1S5AA	CDE2S5AA	CDE005AA	CDE010AA
靜摩擦轉矩 [kgm](Nm) Static Friction Torque	0.55(5.5)	1.1(11)	2.2(22)	4.5(45)	9(90)
動摩擦轉矩 [kgm](Nm) Dynamic Friction Torque	0.5(5.0)	1.0(10)	2.0(20)	4(40)	8(80)
功率 Power [24V](W) at 20°C	11	15	20	25	35
徑 方 向 Radius	A1	63	80	100	125
	A2	46	60	76	95
	A3	34.5	41.5	52	62
	B	67.5	85	106	133
	C	67.5	85	106	133
	D	12 (15)	15	20	25
	F	20	25	30	40
	H	24.6	27	30	33.5
	R	2	2	2	2
	L1	31.1	34.2	40	45
	L2	28.6	31.6	36	40.8
	M	27.1	29.5	34	37.7
	P	9.5	11.5	11.6	11.6
	V1	3.1	4.1	5.1	6.1
	V2	6.3	8	12	13
	V3	6	6	7.5	9.8
	X	1.5	1.4	1.7	2
	a	0.2 (±0.05)		0.3 (+0.05/-0.1)	
軸 方 向 Shaft	G1	42.75	55	61.75	76.3
	G2	49.5	63.5	72.5	85
	G3	9.5	10.5	15.5	11.5
	Y1	4.5	5.5	6.5	6.5
	Y2	12	14	16	16
	b	4 (5)	5	5	7
	t	1.8(2.3)	2.3	2.3	3.3
	t	1.8(2.3)	2.3	2.3	3.3
重量 Weight (kg)	0.48	0.87	1.62	2.91	5.6
保護素子 Protective device	470KD07	GD80KD10		GD80KD14	