

YOUR INNOVATIVE RAFFIA TAPE & TWINE EXTRUSIONEERS

/ JC-FYB / JC-FY / JC-BFY

PLASCO
Your Innovative Extrusioners



www.plasco.com.tw

YOUR INNOVATIVE RAFFIA TAPE & TWINE EXTRUSIONEERS

/ JC-FYB / JC-FY / JC-BFY



Plasco Engineering Inc.

No. 90, Nanpi Rd., Nanodn VII., Taibao City, Chiayi County 61261, Taiwan

Tel : +886 6 237 6176 Fax : +886 6 237 6178

<http://www.plasco.com.tw> E-Mail : sales@plasco.com.tw



PLASCO

Your Innovative Extrusioners



Your Innovative RAFFIA TAPE & TWINE Extrusioners

PLASCO tape extrusion line is the most flexible tape line at the forefront of the global market offering a combination of efficiency, reliability, and quality performance for standard and heavy gauge tape production, fibrillated tape, and tying tape for general packaging, agricultural and various industrial application.



Tape extrusion line from PLASCO have being developed to produce PP/HDPE tape for wide range of applications to cover the requirement of various market sectors; from the standard line specification to the special technical line configuration, Woven/Knitted Bags, Tarpaulin, Netting, Flexible Intermediate Bulk Containers (FIBC), Baler Twine, Cable Filler, Carpet Backing, Synthetic Grass, Tying Tape, Twisted Twine and many more.

We design line concept with enthusiasm, backed by extensive engineering experience, Integrated with the latest proven technology, all of which with an ultimate goal to ensure each line meet the highest performance and quality to exceed every customer's demand.





Fibrillated Tape Line

The JC-FYB series Fibrillated Tape extrusion line is designed to produce fibrillated tape and heavy duty fibrillated tape for wide product range, such as baler twine, insulated cable filler, carpet backing, and other technical application such as synthetic grass.



MODEL	JC-FYB85	JC-FYB100	JC-FYB110
Applicable Material	PP / HDPE		
Extruder	Ø 85 mm	Ø 100 mm	Ø 110 mm
Tape Denier	3000 - 25000 D	3000 - 30000 D	3000 - 35000 D
Working Width	800 mm	1000 mm	1200 mm
Extrusion Capacity	120 kg / hr	200 kg / hr	250 kg / hr

Applications

- Rope
- Cable Filler
- Baler Twine



Applications

- Woven Bag
- Cement Bag



Tape Extrusion Line

The JC-FY series tape extrusion line is available in 85mm and 120mm screw extruder, designed to produce tape line for various applications, an ultimate solution offering combination of efficiency, reliability, performance, and premium quality tape product.



MODEL	JC-FY85	JC-FYB100	JC-FYB120
Applicable Material	PP / HDPE		
Extruder	Ø 85 mm	Ø 100 mm	Ø 120 mm
Tape Denier	800 - 1500 D	800 - 2000 D	800 - 2000 D
Working Width	800 mm	1000 mm	1200 mm
Extrusion Capacity	120 kg / hr	200 kg / hr	300 kg / hr




Tying Tape & Twine Line

The JC-BFY series tying tape extrusion line by blown film extrusion process is specially designed to produce tying tape, polytwine, twisted twine for light packaging application, as well other general packaging and industrial application.

MODEL	JC-BFY55	JC-BFY65	JC-BFY80
Applicable Material	PP / HDPE		
Extruder	Ø 55 mm	Ø 65 mm	Ø 80 mm
Tape Denier	3000 - 9000 D	3000 - 9000 D	4000 - 12000 D
Working Width	500 - 800 mm	600 - 1000 mm	800-1200 mm
Extrusion Capacity	40-60 kg / hr	50-80 kg / hr	60-100 kg / hr

Applications

- Tying Tape
- Raffia
- PP Tape
- Twisted Twine
- Rope Twine

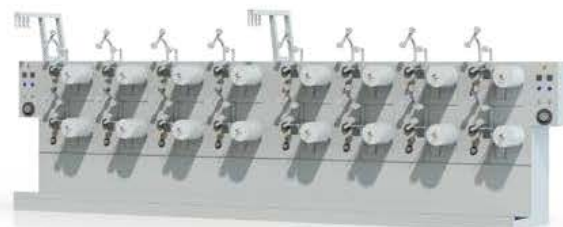

Winder Available in.....

- A. Parallel Winder
- B. Precison Cross Winder
- C. Large package Cross Winder
- D. Jumbo Winder

