



EXTRUSION LAMINATION MACHINE FOR THERMO DOCUMENTS

FK/LAFP-130-2200



Extrusion Excellence

www.fki.com

FK/LAFP-130-2200


EXTRUSION LAMINATION MACHINE FOR THERMO DOCUMENTS

Design Line Speed
400 MPM

Max. Running Speed
350 MPM

Roller width
2200 mm

Lamination Thickness
0.01~0.05 mm

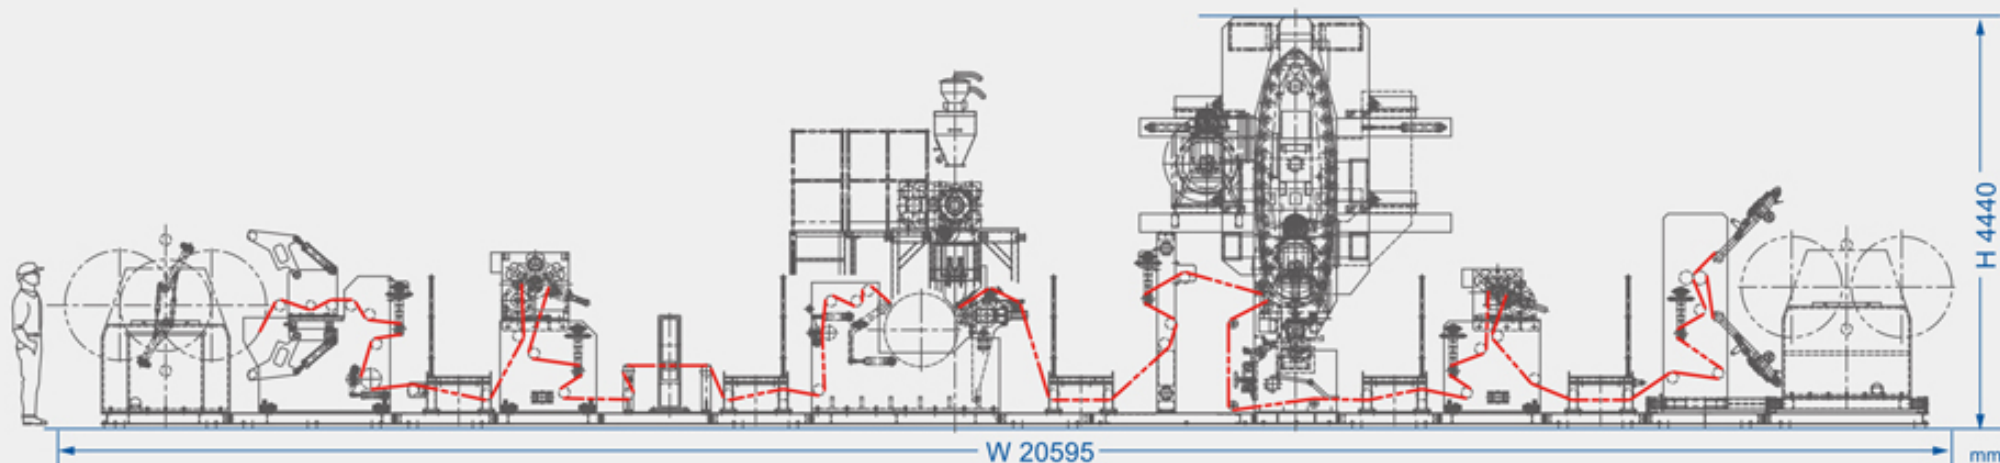

Extruder : 130mm, 300HP, L/D 32:1

Cloeren Auto Die

Main Unwinder : 1000mmΦ, Top & Bottom Cutter

Lamination Unit : 800mmΦ

Rewinder : 1000mmΦ, Top & Bottom Cutter

Drive + PLC Control : ALLEN BRADLEY, USA

Option : Enercon, Corona Treater, USA

Extrusion Capacity : 750kg/hr

Option : NDC or THERMOFISHER Gauging System

Drive Motor : 15HP Constant HP Motor, 6" Air Shaft

Drive Motor : 25HP

Drive Motor : 15HP Constant HP Motor, 6" Air Shaft

AVG. Power Consumption : 264KW / 436A/hr

Machine Size : 20 x 12 x 4M (L x W x H)

We reserve the right to make technical changes without prior announcement. All rights reserved. ©2018 FONG KEE INTERNATIONAL MACHINERY CO., LTD.

Designed by Fongkee 2016-07, +886-6-24517070



FONG KEE INTERNATIONAL MACHINERY CO., LTD.

No. 168, Cheng Pei First Rd., Yongkang Dist., Tainan City 71042, Taiwan

Tel. +886-6-2532157

Fax. +886-6-2533079

Email. sales@fki.com



www.fki.com uCloud