

EXTRUDER

KUNG HSING WAS ESTABLISHED IN 1972, WE PRODUCE HIGH QUALITY MACHINES AND OFFER GOOD SERVICE FOR GLOBAL MARKET AND ACHIEVE FULL SATISFACTION TO CUSTOMERS



MULTI-LAYER CO-EXTRUSION WITH AUTOMATIC THICKNESS PROFILE CONTROLLER AIR RING (GERMANY MADE), INNER BUBBLE COOLING SYSTEM (U. S. A. MADE), THICKNESS VARIATION: $\pm 2\% \sim 3\%$



Kung Hsing
PLASTIC MACHINERY

ISO 9001 
Taiwan





KS-AP 65 PP BLOWN FILM MACHINE



KS-CFLL55+65T THREE LAYER CO-EXTRUSION BLOWN FILM LINE
(1) GAIN IN WEIGHT GRAVIMETRIC DOSING UNIT
(2) WIDTH MEASUREMENT AND CONTROLLER
(3) IBC COMPUTER CONTROL SYSTEM



KS-CFLL100+135T THREE LAYER CO-EXTRUSION BLOWN FILM LINE
(a) LAY-FLAT WIDTH: 6 M
(b) MAX. EXTRUSION OUTPUT: 1.2 TONS/HOUR
(c) SPECIALLY FOR AGRICULTURAL AND CONSTRUCTION FILM




KS-FLL150 LDPE MONO LAYER BLOWN FILM LINE
Max. extrusion output: 950 kg/h
Film width: 4000 mm
Equipped with Gravimetric batch blender
IBC computer control system
and Horizontal oscillating take up unit.



KS-CFLL75+85T THREE LAYER CO-EXTRUSION BLOWN FILM LINE
(1) GAIN IN WEIGHT GRAVIMETRIC DOSING UNIT
(2) WIDTH MEASUREMENT AND CONTROLLER
(3) SECONDARY GUSSET DEVICE

KS-FLB TYPE BIODEGRADABLE BLOWN FILM LINE



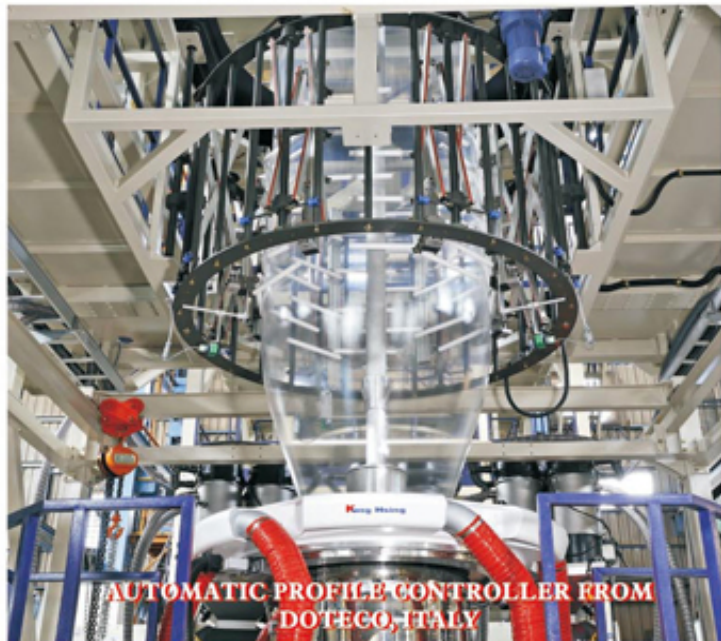

**KS-MH45+50 ABA MULTI-LAYER
HIGH SPEED BLOWN FILM LINE**



**KS-MH55+65 ABA MULTI-LAYER
HIGH SPEED BLOWN FILM LINE
INCLUDING VERTICAL TYPE
OSCILLATING TAKE UP UNIT
& EPC**



**KS-MH55+65 ABA MULTI-LAYER
HIGH SPEED BLOWN FILM LINE
INCLUDING HORIZONTAL
TYPE OSCILLATING
TAKE UP UNIT,
EPC, & CORONA
TREATMENT**





1. KS-CFL50+55T THREE LAYER CO-EXTRUSION BLOWN FILM LINE EQUIPPED WITH GAIN-IN-WEIGHT GRAVIMETRIC BATCH BLENDER (ITALY MADE)
2. KS-CFL50+65T THREE LAYER CO-EXTRUSION BLOWN FILM LINE EQUIPPED WITH GAIN-IN-WEIGHT GRAVIMETRIC BATCH BLENDER (IRELAND MADE), AUTOMATIC PROFILE MEASUREMENT AND CONTROLLER (GERMANY MADE) AND IBC SYSTEM (U.S.A. MADE)
3. KS-ES50 HDPE HIGH SPEED BLOWN FILM LINE

KS-FEH TYPE HDPE SUPER HIGH SPEED BLOWN FILM LINE





KS-ML-5-55-55-55-55 5 LAYER CO-EXTRUSION BLOWN FILM LINE

1. MAXIMUM LAY-FLAT WIDTH 1400mm
2. HIGH PERFORMANCE $\phi 300$ mm DIE
FOR MAXIMUM OUTPUT 600kg / hr
3. COMPUTER SUPERVISOR SYSTEM WITH
19" COLOR TOUCH SCREEN
4. GAP / SURFACE / CONTACT DRIVE 3 IN 1
WINDERS WITH 7.5" COLOR TOUCH SCREEN
5. DOTEKO GRAVIMETRIC BATCH BLENDER
6. K-DESIGN HEIGHT ADJUSTABLE AUTO AIR RING
7. K-DESIGN CAPACITIVE TYPE THICKNESS PROFILE
MEASUREMENT WITH 360 DEGREE REVERSING RING
8. DR. JOSEPH IBC SYSTEM
9. VETAPHONE CORONA SURFACE TREATMENT



光興塑膠機械股份有限公司
KUNG HSING PLASTIC MACHINERY CO., LTD.

總公司：嘉義縣太保市嘉太工業區中興路13號
HEAD OFFICE:
13 CHUNG HSING ROAD, CHIA TAI INDUSTRIAL
DISTRICT, CHIA-YI HSIEN, TAIWAN

TEL : 886-5-2374466 (12 LINES)
FAX : 886-5-2376971 , 2381029
http : // www.kunghsing.com.tw
E-mail : ks.sales@kunghsing.com.tw
ks.service@kunghsing.com.tw