

雙脫氣塑膠廢料處理再生製粒機


DOUBLE DEGASIFICATION GRANULE-MAKING MACHINE
FOR TREATMENT OF PLASTIC WASTE

«RECICLADORA»

TWO STAGE TYPE (子母型)

SM-RC100TSF

(WITH FORCE FEEDER)

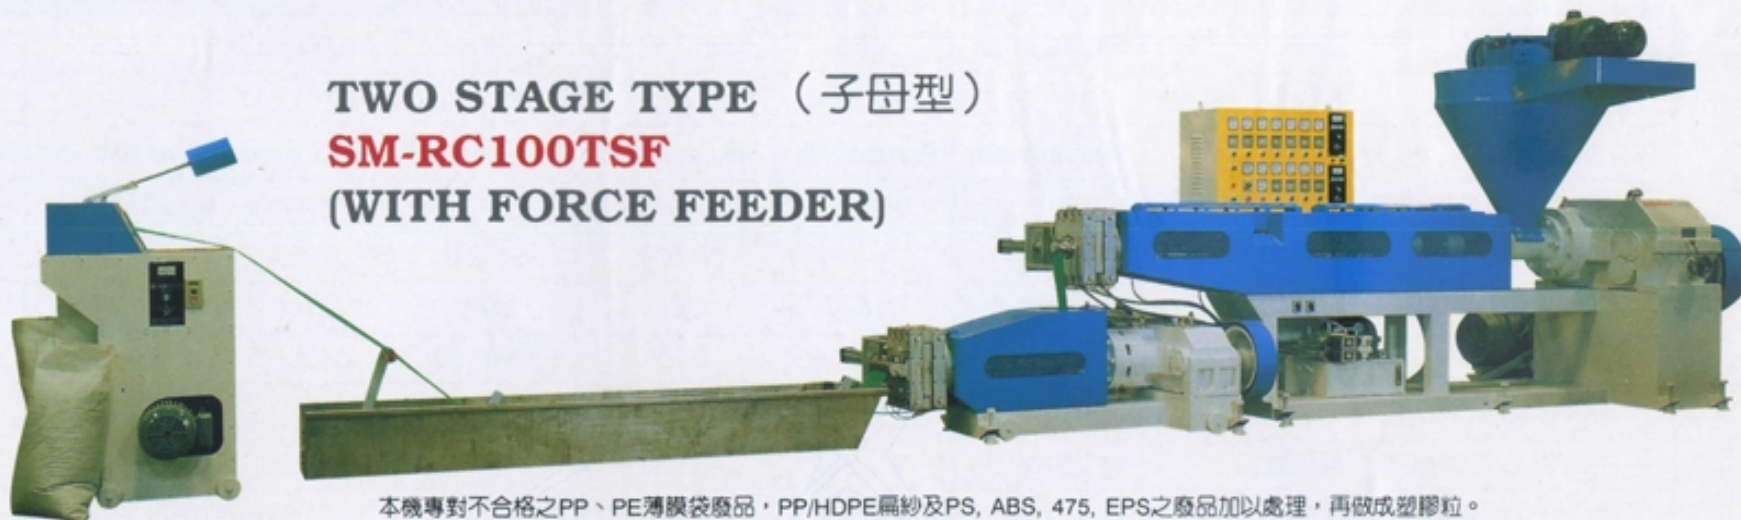


本機專對不合格之PP、PE薄膜袋廢品，PP/HDPE扁紗及PS、ABS、475、EPS之廢品加以處理，再做成塑膠粒。

This machine is especially designed for processing substandard waste PP, PE Blown film, PP/HDPE FLAT YARN and ABS, 475, EPS sheet into plastic granule.

Esta recicladora es diseñar para recuperar las películas plasticos como PP, PE película abandonados, PP/HDPE RAFIA y laminas de PS, ABS, 475, EPS para granularlo a resina.

SM-RC100TS

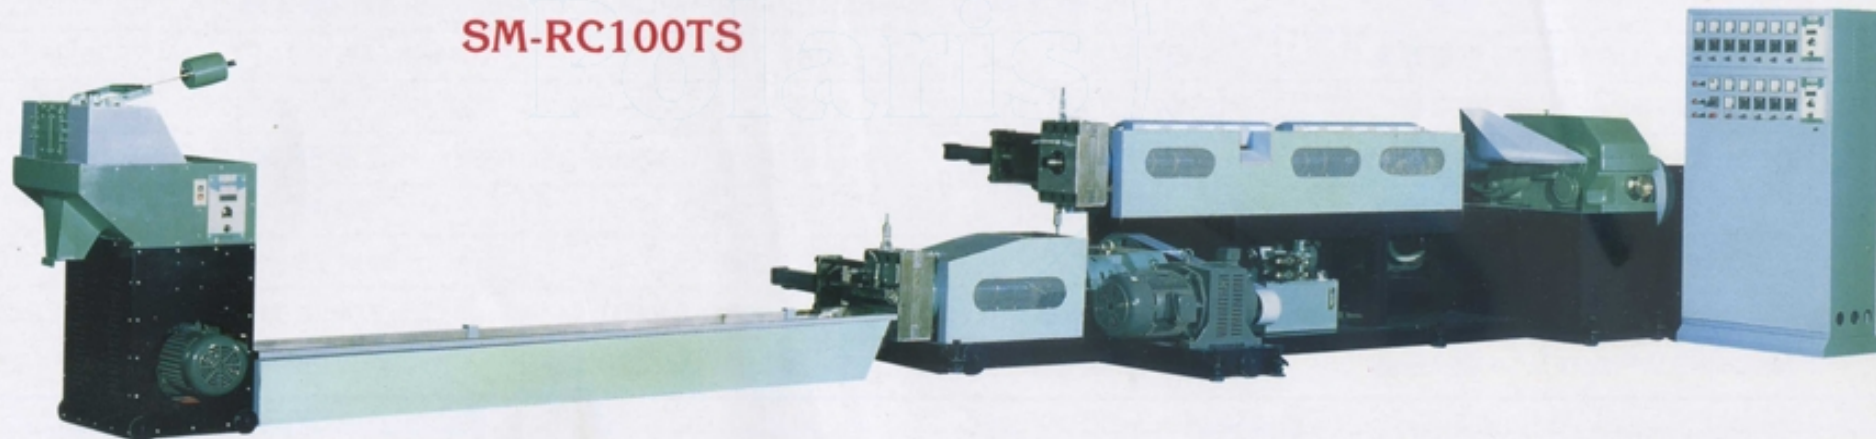

勝家塑膠工業有限公司

SENGAR MACHINERY CO., LTD.

公 司：台北市東豐街7號12樓之1

OFFICE：12F-1, No. 7, Tung Feng St., Taipei 106, Taiwan, R.O.C.

TEL：(02)27016312 . 27090035 . 27089088 . 27091849

FAX：886-2-27016797 . 27072203

E-mail：sencar@ms22.hinet.net

P.O.BOX 1-132 Taipei, Taiwan, R.O.C.

FACTORY：No. 4, Lane 48, Chunghsiao Rd., Panchiao, Taipei Hsien, Taiwan, R.O.C.

SPECIFICATION 規格：

MODEL	型 號	SM-RC65TS (F)		SM-RC85TS (F)		SM-RC100TS (F)		SM-RC120TS (F)	
MATERIAL	原料	PP/PE FILM	EPS	PP/PE FILM	EPS	PP/PE FILM	EPS	PP/PE FILM	EPS
OUTPUT (KG/HR)	押出量／每小時	35 – 60	20 – 30	80 – 120	30 – 40	100 – 200	40 – 60	150 – 300	60 – 80
EXTRUDER	押出機	Main-extruder	Sub-extruder	Main-extruder	Sub-extruder	Main-extruder	Sub-extruder	Main-extruder	Sub-extruder
SCREW DIAMETER	螺桿直徑	65mm ϕ	65mm ϕ	85mm ϕ	85mm ϕ	100mm ϕ	100mm ϕ	120mm ϕ	120mm ϕ
SCREW ROTATION	螺桿速度 (RPM)	10-100	10-100	10-100	10-100	10-100	10-100	10-100	10-100
L/D RATIO	長度與直徑比	32:1	10:1	32:1	10:1	30:1	10:1	30:1	10:1
DRIVING MOTOR	驅動馬達	25HP VS	7.5HP VS	25HP	10HP VS	40HP	15HP VS	60HP VS	20HP VS
HEATING ZONE	電熱組數	5	3	6	3	7	4	8	4
HEATING CAPACITY	電熱量	20 KW	9.5 KW	28 KW	9.5 KW	40 KW	10 KW	45 KW	15 KW
SPEED RANGE	速度控制	STEPLESS 無段變速		2 STEP STEPLESS		2 STEP STEPLESS		2 STEP STEPLESS	
FORCE FEEDER	強迫給料馬達	3HP VS		3HP VS		5HP VS		5HP VS	
VENT EQUIPMENT	脫氣裝置	1 SET		1 SET		1 SET		1 SET	
DIE	模頭	HYDRAULIC SCREEN CHANGER FOR BOTH DIE 子母機皆油壓換網							
HYDRAULIC MOTOR	油壓馬達	3 HP		5 HP		5 HP		5 HP	
HEATING CAPACITY	電熱量	5 KW	4 KW	8 KW	7.5 KW	9.5 KW	8.5 KW	10.5 KW	9.5 KW
COOLING UNIT	冷卻裝置	WATER BATH (STAINLESS STEEL) 不銹鋼冷水槽							
DRYER	吸水風車	1/4HP		1/4HP		1/4HP			
CUTTING UNIT MOTOR	切粒機馬達	3HP VS		3HP VS		5HP VS		7-1/2HP VS	
FLOOR DIMENSION	佔地尺寸	8.5x1.8x1.8 (M)		9.7x1.8x1.8 (M)		11.1x2.0x1.8 (M)		11.3x2.1x1.8 (M)	
MACHINE WEIGHT	機械重量	3000 kgs		3400 kgs		4200 kgs		5000 kgs	

由於設計上或製造上的需要，有時會更改規格或尺寸，恕不另行通知。

Specifications are subject to change without notice for improvement.