



EXTRUSION LAMINATION MACHINE FOR RELEASE PAPER

FK / LAR-125-1800



Extrusion Excellence

www.fki.com



FK/LAR-125-1800

EXTRUSION LAMINATION MACHINE FOR RELEASE PAPER



Design Line Speed

300 MPM



Max. Running Speed

250 MPM




Roller width

1800 mm



Lamination Thickness

0.01~0.04 mm

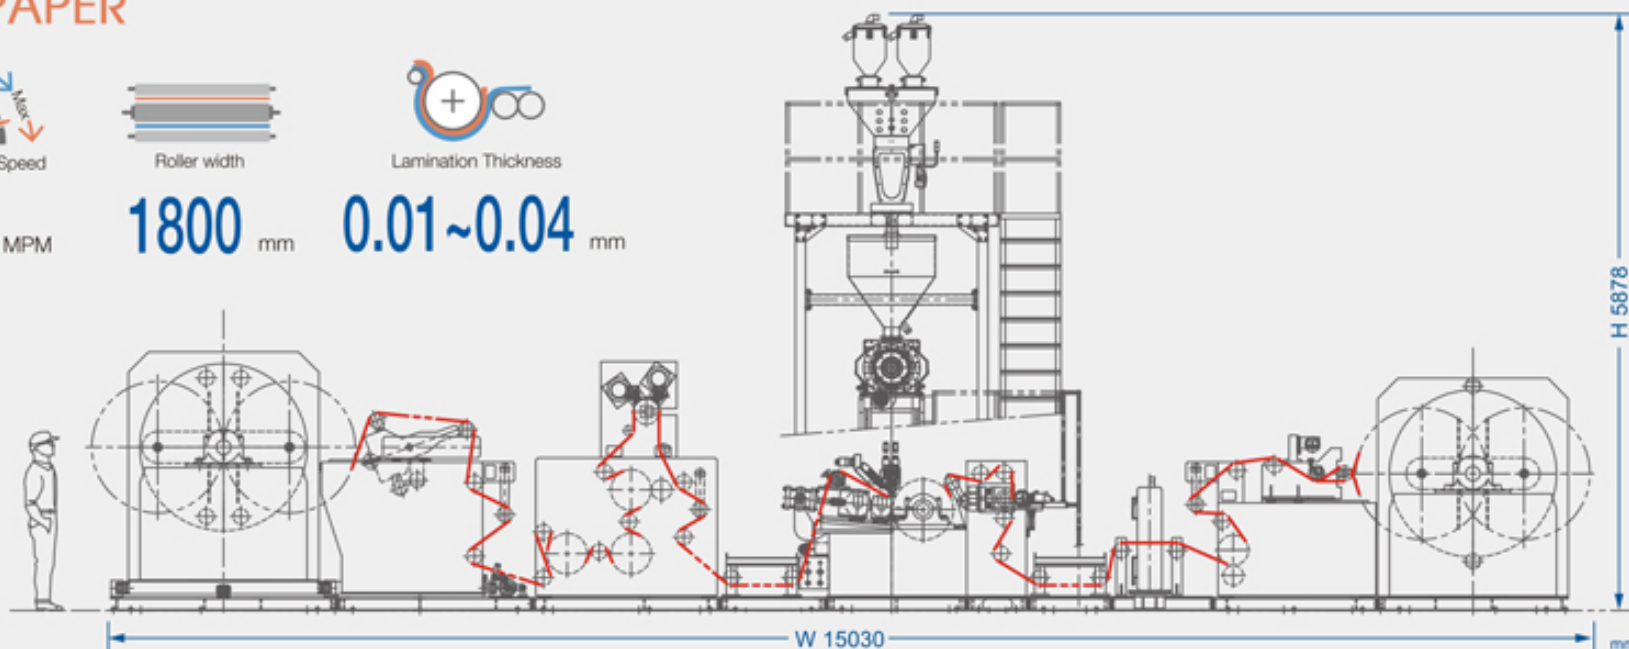

Extruder : 125mm, 200HP, L/D 32:1

Mono Auto Die, Cloeren

Main Unwinder : 1300mmΦ, Top & Bottom Cutter, 3" + 6" Air Shaft

Lamination Unit : 600mmΦ, Sasakura, Japan

Rewinder : 1300mmΦ, Top & Bottom Cutter, 3" + 6" Air Shaft

Drive + PLC Control : ALLEN BRADLEY, USA

Machine Space : 17 x 12 x 6m (L x W x H)

Extrusion Capacity : 500-550 kg/hr

THERMOFISHER Gauging System

Drive Motor : 15HP Constant HP Motor x 2

Drive Motor : 20HP

Drive Motor : 15HP Constant HP Motor x 2

AVG. Power Consumption : 175kw / 266A/hr

Option : 4 Components Gravimetric Doser

We reserve the right to make technical changes without prior announcement. All rights reserved. ©2018 FONG KEE INTERNATIONAL MACHINERY CO., LTD.

Designed by Polaris 2018-07-688-4-24517070



FONG KEE INTERNATIONAL MACHINERY CO., LTD.

No. 168, Cheng Pei First Rd., Yongkang Dist., Tainan City 71042, Taiwan

Tel. +886-6-2532157

Fax. +886-6-2533079

Email. sales@fki.com



www.fki.com uCloud