

TP800SZ

阿莎麗夾鏈線



asar
PLASTIC CORPORATION



貼合夾鏈袋高速封切機

ZIPPER APPLICATOR AND HIGH SPEED SIDE SEALING MACHINE

Shapes of Product

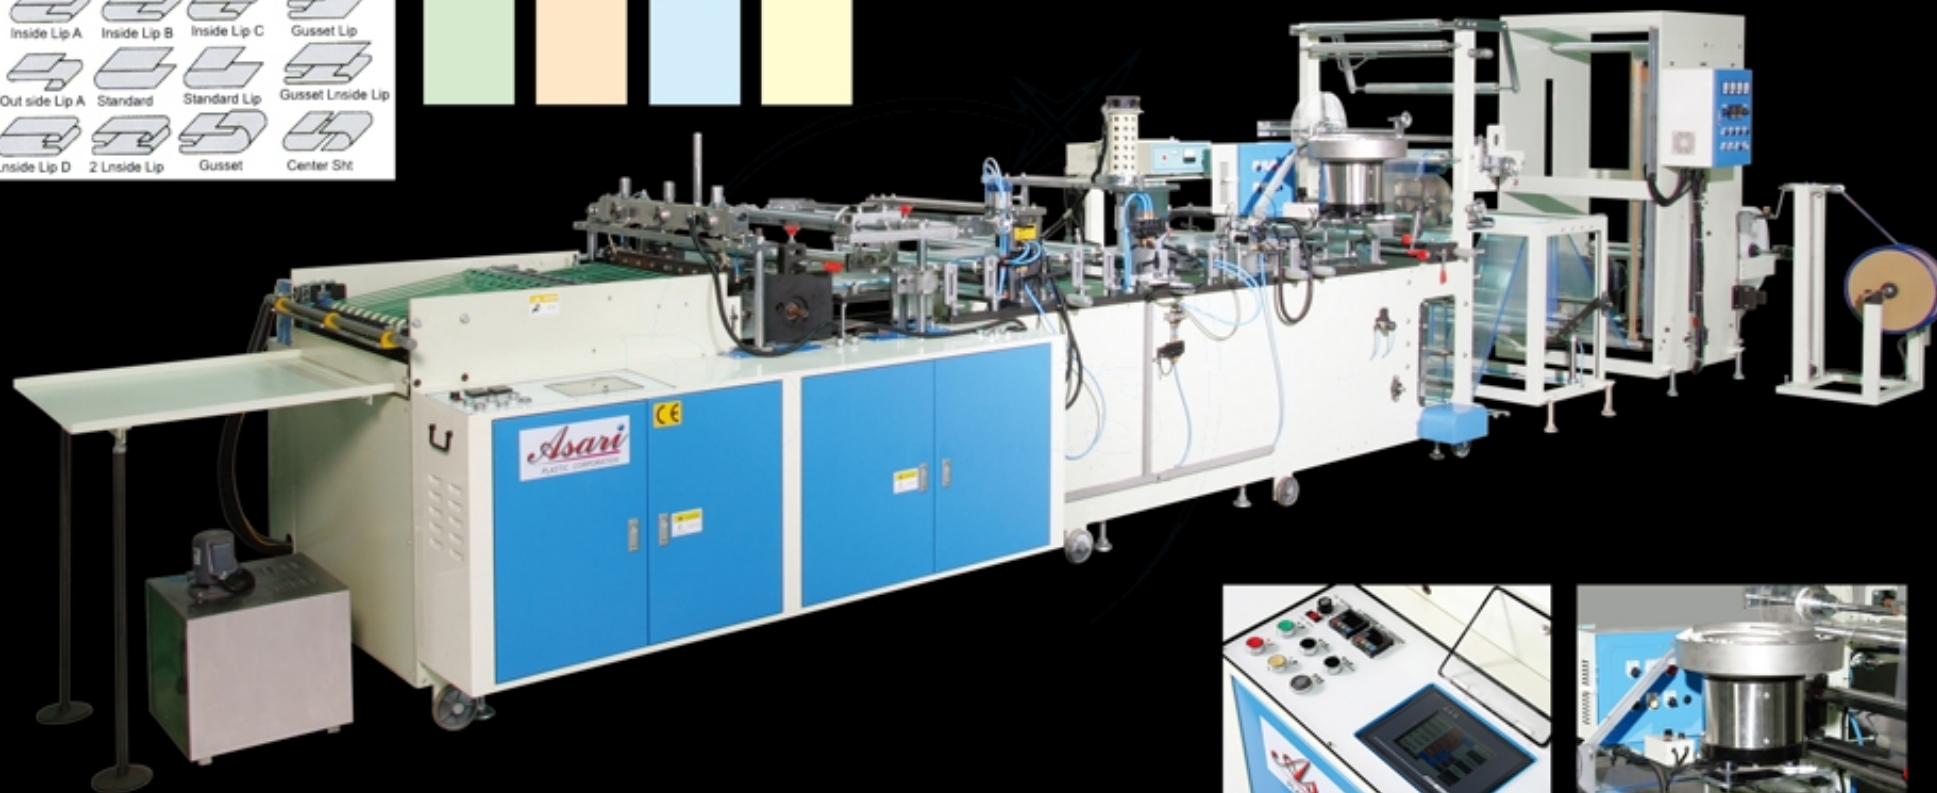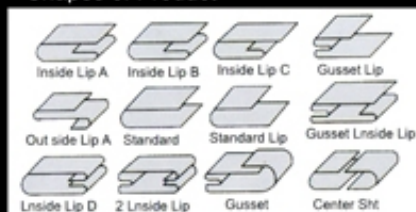

ZIPPER APPLICATOR AND HIGH SPEED SIDE SEALING MACHINE 貼合夾鏈袋高速封切機

TP800SZ

SPECIFICATION:

貼合裝置 Zipper Applicator		
引取馬達	Take-Up Motor	1HP AC+Inverter(變頻器)
鐵氟龍耐熱皮帶	Teflon Heat Resistant Tape	4Pc
貼合鋼刀	Copper Attachment Knife	2Pc
割邊設備	Side Slitting Knife	1 Set
夾鍊條放料設備	Zipper Storage Frame	1 Set
800mm引取輥	800mm Take-Up Roller	1 Set
側封裝置 Side Sealing Unit		
製袋種類	Bag Type	Side Sealing(側封袋)
製袋長度	Bag Length	600mm
製袋寬度	Bag Width	700mm
製袋厚度	Bag Thickness	0.012~0.2mm
製袋速度	Speed	Side Seal Bag(平袋) 30~230 pc/min Zipper Bag(夾鏈袋) 30~140 pc/min
張力控制	Tension Control Unit	1 Set
主機馬達	Main Motor	AC 2HP+Inverter(變頻器)
超音波壓平裝置	Ultrasonic Stamping Unit	2000W
熱鋼刀	Copper Sealing Knife	1 Set
印刷電眼	Photo Cell	German SICK(德製 SICK)x 1 Set
觸控式電腦人機介面	HCI Touch Screen Interface	
送料方式	Feeding Method	2000W Japan Servo Motor (2000W日本伺服馬達)
集料台	Collector	1 Set
PLC控制系統	PLC Control System	
總耗電	Total Power Required	8 Kw
本機適用於無翼夾鏈線 Suitable for string like zipper profile		
選購配備 Selective Equipment		
自動入頭設備	Automatic Slider Insertion	點斷設備 Perforating Knife
白邊條設備	White Tape Reinforcement Unit	折邊設備 Gusseting Unit
各類打洞設備	Varies Hole Punch Unit	CE裝置 CE Self Declaration Modification
三角對折設備(EPC)	Triangular Folding Unit with EPC	吊掛裝置 Hanger Insertion Unit

機械特性：

- * 本機適用LDPE PP OPP CPP BOPP和EVA。
- * 本機採用全自動伺服馬達電腦數值控制長度、操作簡便、封口牢固、品質美觀。
- * 製作過程從整捲膜捲、三角對折、自動對邊、割邊、穿夾鏈、貼合、自動入拉頭、印刷電眼、打洞、超音波壓平、熱切斷、自動計數，全程採用PLC控制系統全自動作業。
- * 本機附有無料自動停車設備、印刷電眼失效自動停車設備、溫度不夠自動停車設備。

The Machine Features:

- * The unit suitable for LDPE PP OPP CPP BOPP and EVA.
- * The machine uses fully automatic digitalized servo motor to control length; it is easy for operation and provides strong sealing and quality appearance.
- * Process of production begins from rolled film, triangular folding device, automatic edge alignment, slitting, zipper attachment, automatic slider insertion, photo cell, hole punching, heat cutting and seal and ends with automatic counter; all of the above operations are fully automate by PLC system.
- * The machine equips automatic stop equipment for running out of material, photo cell error and temperature abnormality.

Asari 阿莎麗塑膠有限公司
PLASTIC CORPORATION 台南縣安定鄉中沙村中溝1之5號
No. 1-5, Jhonglun, Jhongsha Village, Anding Township,
Tainan County, Taiwan E-mail: sale@asari.com.tw
TEL: +886-6-5933566 FAX: +886-6-5933567
http://www.asari.com.tw http://www.asari.net.tw